# **Eccentric Quick Clamps** • with female thread

## 23390.0001



#### **Product Description**

For quick and easy clamping and releasing of workpieces. When using the "adjustable" design (picture 2) the lever position can be moved.

#### **Material**

#### Support washer

· Thermoplastic PA, glass-fiber reinforced

#### Lever

 Zinc die-cast, plastic coated, black, similar to RAL 9005

#### Threaded part

· Steel, zinc-plated by galvanization


#### Inner parts

• Steel, zinc-plated by galvanization

#### Adjusting nut

Steel, zinc-plated by galvanization

#### **Drawing**

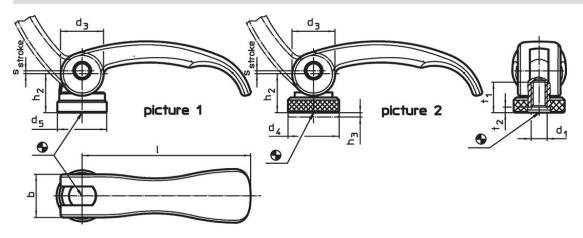

### **Order information**

Dimensions								Stroke		I	Art. No.	
ı	d <sub>1</sub>	d <sub>3</sub>	d <sub>5</sub>	<b>h₂</b> max.	b	t₁	t <sub>2</sub> min. in clamping position	s at 90° lever position	max.			
		'		[mm]	[°C]	[g]						
with fema	with female thread – picture 1, Steel											
63	M6	16	18.5	16.4	16	13	3	0.75	80	58	23390.0001	




Halder, Inc.

www.halderusa.com Page 1 of 2

Published on: 12.8.2024

### **Application example**

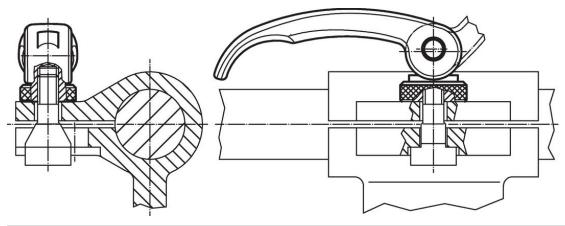

### Compliance

#### **RoHS** compliant

Contains lead - compliant according to exceptions 6a / 6b / 6c.

#### Contains SVHC substances >0,1% w/w

Contains lead - SVHC list [REACH] as of 27.06.2024.

#### **Contains Proposition 65 substances**



Lead can cause cancer and reproductive harm from exposure https://www.P65Warnings.ca.gov/

#### **Free from Conflict Minerals**

This product does not contain any substances designated as "conflict minerals" such as tantalum, tin, gold or tungsten from the Democratic Republic of Congo or adjacent countries.



www.halderusa.com Page 2 of 2
Published on: 12.8.2024

Halder, Inc.