# Ball Lock Pins · self-locking, with combination handle, precipitation-hardened 22380.0165



# **Product Description**

For quick fastening, locking, adjusting, changing and securing. Quickly and easily unlockable for frequently repeated connections.

All versions are corrosion resistant. When using stainless steel 1.4542: high-strength, hardened, abrasion resistant pin with high load capacity.

Ergonomic grip, different colour combinations available. The grip design provides protection of unintentional unlocking.

## Material

### Pin part

· Stainless steel 1.4542, precipitationhardened

## Handle

• Thermoplastic PA 6 grey / orange

· Stainless steel

# **Operation**

The balls are unlocked by pressing the button.

### Characteristic

Types from stainless steel 1.4542 with marking below the balls.

## More information

### **Notes**

Special types on request.

# References

Stainless steel 1.4305, see EH 22370.

### **Accessories**

Can easily be fitted with retaining cable EH 22400.

# **Further products**

- · Ball Lock Pins, self-locking, with combination handle
- Locating Bushings, for ball lock pins and socket pins
- Locating Bushings, with flange, for ball lock pins and socket pins
- **Retaining Cables**
- Positioning Bushings, with collar, DIN 172 A
- Positioning Bushings, without collar, DIN 179 A

# **Drawing**



Halder, Inc.

\*\* Types from stainless steel 1.4542 with marking

www.halderusa.com Page 1 of 3 Published on: 12.8.2024


# **Order information**

Dimensions									Shearing			I	Art. No.	
<b>d</b> <sub>1</sub> -0.04 -0.08	l <sub>1</sub> +0.6	d <sub>2</sub>	d <sub>3</sub>	d <sub>4</sub>	l <sub>2</sub> ±1	l <sub>3</sub>	l <sub>4</sub>	hole H11	resistance, two-shear <sup>1)</sup> min.	min.	max.			
[mm]								[mm]	[kN]	[°C]		[g]		
Handle	Handle colour: orange													
6	25	7	33.2	14.5	7	26.7	10.8	6	35	-30	80	19	22380.0165	

<sup>1)</sup> Shearing resistance similar to DIN 50141


# **Application example**



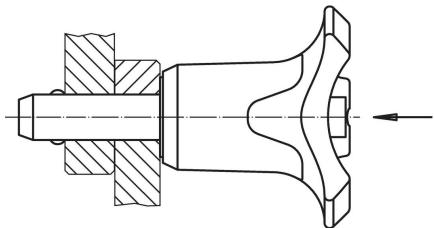

Halder, Inc.

Page 2 of 3 www.halderusa.com Published on: 12.8.2024

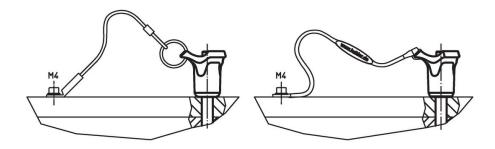

# Compliance

# **RoHS** compliant

Compliant according to Directive 2011/65/EU and Directive 2015/863.

# **Does not contain SVHC substances**

No SVHC substances with more than 0.1% w/w contained - SVHC list [REACH] as of 27.06.2024.

# Does not contain Proposition 65 substances

No Proposition 65 substances included. https://www.P65Warnings.ca.gov/

## **Free from Conflict Minerals**

This product does not contain any substances designated as "conflict minerals" such as tantalum, tin, gold or tungsten from the Democratic Republic of Congo or adjacent countries.



www.halderusa.com Page 3 of 3
Published on: 12.8.2024

Halder, Inc.