# **Ball Lock Pins** • self-locking, with combination handle, precipitation-hardened 22380.0870



# **Product Description**

For quick fastening, locking, adjusting, changing and securing. Quickly and easily unlockable for frequently repeated connections.

All versions are corrosion resistant. When using stainless steel 1.4542: high-strength, hardened, abrasion resistant pin with high load capacity.

Ergonomic grip, different colour combinations available. The grip design provides protection of unintentional unlocking.

#### Material

#### Pin part

 Stainless steel 1.4542, precipitationhardened

#### Handle

• Thermoplastic PA 6 black / black

#### Spring

· Stainless steel

# **Operation**

The balls are unlocked by pressing the button.

#### Characteristic

Types from stainless steel 1.4542 with marking below the balls.

#### More information

#### **Notes**

Customized design on request.

# References

Stainless steel 1.4305, see EH 22370.

#### **Accessories**

Can easily be fitted with retaining cable EH 22400.

# **Further products**

- Ball Lock Pins, self-locking, with combination handle
- Locating Bushings, for ball lock pins and socket pins
- Locating Bushings, with flange, for ball lock pins and socket pins
- · Retaining Cables
- Positioning Bushings, with collar, DIN 172 A
- Positioning Bushings, without collar, DIN 179 A

# **Drawing**



Halder, Inc.

\*\* Types from stainless steel 1.4542 with marking

www.halderusa.com Page 1 of 3

Published on: 17.11.2024


# **Order information**

Dimensions									Shearing resistance,	<u>B</u>		I	Art. No.
<b>d</b> <sub>1</sub> -0.04 -0.08	l <sub>1</sub> +0.6	d <sub>2</sub>	d <sub>3</sub>	d <sub>4</sub>	l <sub>2</sub> ±1	l <sub>3</sub>	I <sub>4</sub>	hole H11	two-shear <sup>1)</sup> min.	min.	max.		
[mm]								[mm]	[kN]	[°C]		[g]	
Handle colour: black													
12	50	14.5	47.6	25.2	10.6	39.7	16.7	12	144	-30	80	117	22380.0870

<sup>1)</sup> Shearing resistance similar to DIN 50141

# **Application example**



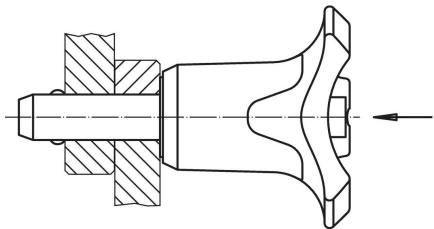

www.halderusa.com Page 2 of 3
Published on: 17.11.2024



# Compliance

# **RoHS** compliant

Compliant according to Directive 2011/65/EU and Directive 2015/863.

# Does not contain SVHC substances

No SVHC substances with more than 0.1% w/w contained - SVHC list [REACH] as of 27.06.2024.

# Does not contain Proposition 65 substances

No Proposition 65 substances included. https://www.P65Warnings.ca.gov/

#### **Free from Conflict Minerals**

This product does not contain any substances designated as "conflict minerals" such as tantalum, tin, gold or tungsten from the Democratic Republic of Congo or adjacent countries.



Halder, Inc.

www.halderusa.com Page 3 of 3

Published on: 17.11.2024