Lateral Spring Plungers EH 22140.



Product Description

To be used for positioning and applying pressure, e.g. during painting and sandblasting.

Material

- · Stainless steel, hardened
- · Thermoplastic POM, white
- Ball-bearing steel, hardened

Body

· Free cutting steel, blackened

Spring

- Stainless steel
- Plastic (PU)

Assembly


Insertion bore I₃ to be considered.


More information

Notes

Customized design on request.

Drawing



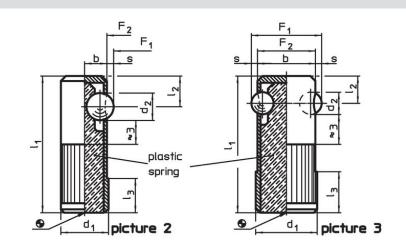

Order information

Dimensions						Location	Stroke	Spring load ¹⁾		<u> </u>		I	Art. No.	
d ₁ +0.1	d ₂	I ₁	l ₂	l ₃	b	hole H8	s	F ₁ ~	F ₂ ~	min.	max.	_		
	[mm]					[mm]	[mm]	[N]		[°C]		[g]		
ball from stainless steel, standard spring load, one-sided – picture 1														
8	3.0	25	3.6	6	3.2	8	0.8	2.5	6.5	-30	50	8.9	22140.0008	
10	4.0	30	4.2	7	4.0	10	1.0	4.5	9.0	-30	50	16.0	22140.0010	
12	5.0	35	4.8	9	5.0	12	1.6	6.5	13.0	-30	50	28.0	22140.0012	
14	6.5	40	5.8	10	5.4	14	1.9	8.0	18.0	-30	50	43.0	22140.0014	
ball fro	ball from thermoplastic, standard spring load, one-sided – picture 1													
8	3.0	25	3.6	6	3.2	8	0.8	2.5	6.5	-30	50	8.8	22140.0108	
10	4.0	30	4.2	7	4.0	10	1.0	4.5	9.0	-30	50	16.0	22140.0110	
12	5.0	35	4.8	9	5.0	12	1.6	6.5	13.0	-30	50	28.0	22140.0112	
14	6.5	40	5.8	10	5.4	14	1.9	8.0	18.0	-30	50	42.0	22140.0114	
ball from ball-bearing steel, heavy spring load, one-sided – picture 2														
10	5.5	30	7.0	8	4.5	10	1.0	60.0	170.0	-40	80	8.6	22140.0410	
12	6.5	35	8.0	9	5.5	12	1.5	80.0	260.0	-40	80	14.0	22140.0412	
14	8.0	40	9.0	10	6.5	14	2.0	120.0	480.0	-40	80	20.0	22140.0414	
ball from	ball from ball-bearing steel, heavy spring load, on both sides – picture 3													
16	5.5	35	7.0	11	15.0	16	1.5	110.0	220.0	-40	80	20.0	22140.0616	
18	6.5	40	8.0	12	17.0	18	1.8	120.0	330.0	-40	80	29.0	22140.0618	
22	8.0	45	9.0	15	21.0	22	2.5	130.0	540.0	-40	80	43.0	22140.0622	

¹⁾ statistical average value





Halder, Inc.

Page 1 of 2 Published on: 17.11.2024

www.halderusa.com

Application example

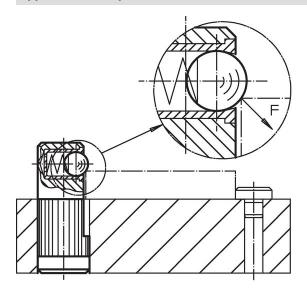

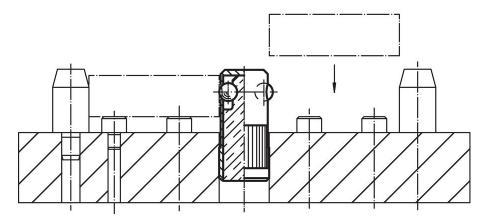

Compliance

RoHS compliant

Contains lead - compliant according to exceptions 6a / 6b / 6c.

Contains SVHC substances >0,1% w/w

Contains lead - SVHC list [REACH] as of 27.06.2024.

Contains Proposition 65 substances



Lead can cause cancer and reproductive harm from exposure https://www.P65Warnings.ca.gov/

Halder, Inc.

Free from Conflict Minerals

This product does not contain any substances designated as "conflict minerals" such as tantalum, tin, gold or tungsten from the Democratic Republic of Congo or adjacent countries.



www.halderusa.com Page 2 of 2
Published on: 17.11.2024